

ICAO Obstacle Light (FOCA) Crane Light

Art-Nr. 10-082

Low-intensity

Red (LED) permanent light
Infrared (IR) flashing integrated

Low-intensity special

Red (LED) und Infrared (IR)
Flashing integrated



Technical Data

Dimension (ØxH):	158mm x 273mm
Weight:	1.5kg
Protection:	IP54
Operating voltage:	110 - 230VAC / 12VDC / 24VDC
Current consumption:	70mA (AC) / 600mA (DC)
Synchronization:	GPS

Red (LED)

Luminous intensity:	35cd
Wavelength:	623nm

Infrared (LED)

Radiance:	105mW/sr
Wavelength:	850nm
Flash frequency:	0,5Hz (30/min); adjustable

Regulations: ICAO, Annex 14, Chapter 6
FOCA, AD I-006 D, Guidelines aeronautical obstacles

Characteristics

- Automatic GPS synchronization
- Cost-efficient
- Weather resistant
- Easy assembly
- High impact resistant



Video:



ICAO

Verkehrstechnik
Technique du trafic
Traffic Control Engineering





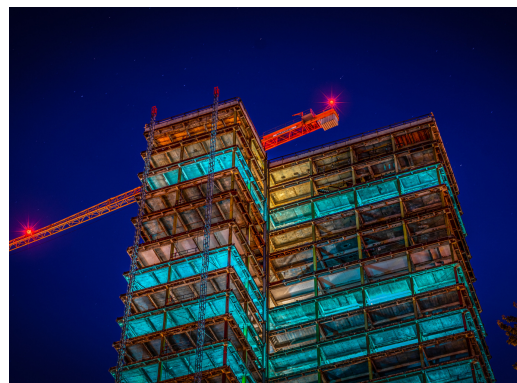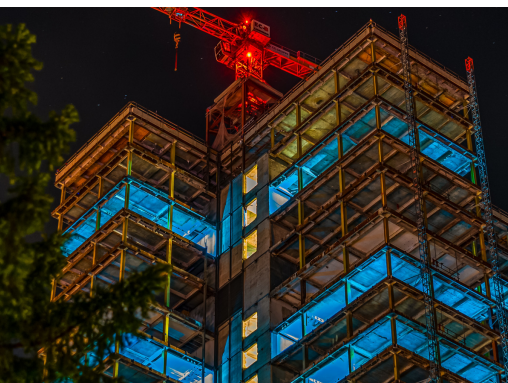

Light distribution

Type A

Type B & E

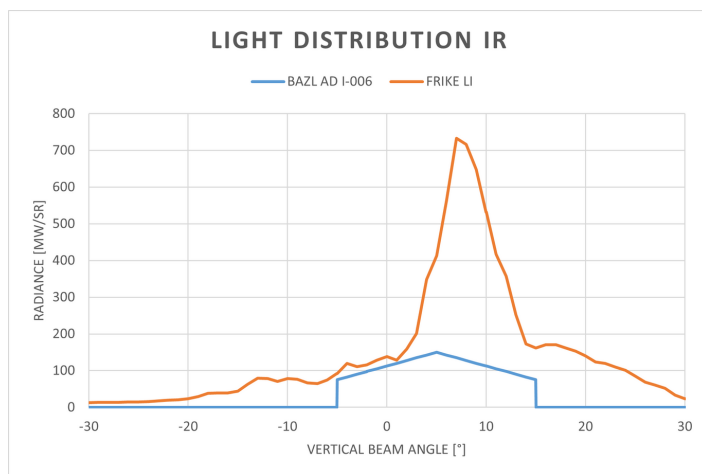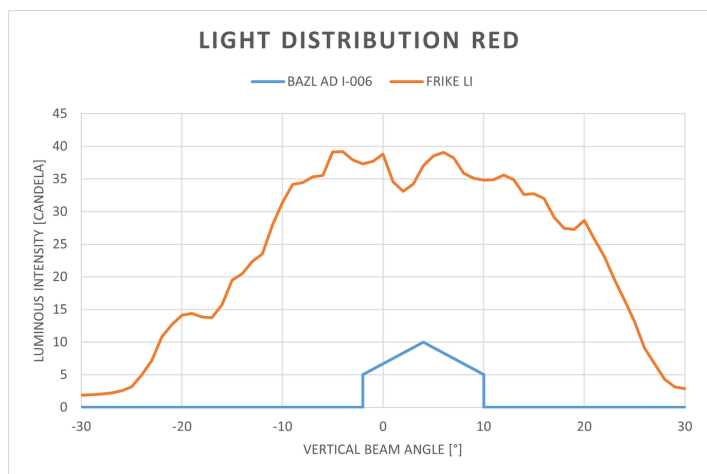

Accessories



Marking tarpaulin
130cm x 200cm, 10 Eyelets
Art-Nr. 10-089



Magnetic holder with safety rope
Art-Nr. 10-082M



Automatic twilight control
Art-Nr. 10-096



Marking ballon
Art-Nr. 10-098



Mounting set plastic tube
Art-Nr. 10-082R



Contact us

FRIKE electronic AG
Signalstrasse 1, 8194 Hüntwangen
Switzerland
+41 44 869 23 44, info@frike.ch
www.frike.ch



Verkehrstechnik
Technique du trafic
Traffic Control Engineering